


# INVENTRONICS

EUC-040SxxxDVM000x

Rev. C

- THD 10%
- 
- 0-10V
- : 4kV 6kV
- 
- Class I
- 
- &
- IP67
- 5

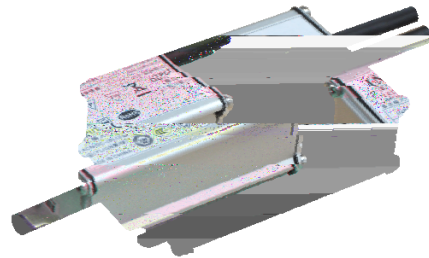

EUC-040SxxxDVM000x

40W IP67

90-305Vac

					120Vac	220Vac	

- 1 120-240Vac 127-250Vdc
- 2 220 Vac 100%


# INVENTRONICS

EUC-040SxxxDVM000x

Rev. C

				100% 120Vac
				100% 220Vac
(I <sup>2</sup> t)				220Vac 25°C 10%Ipk-10%Ipk = 36 μs

				100%
/				100%
			±	100%
			±	
		°		°

Cree XLamp XP-G

25°C




# INVENTRONICS

*EUC-040SxxxDVM000x*


*Rev. C*


---

降额曲线

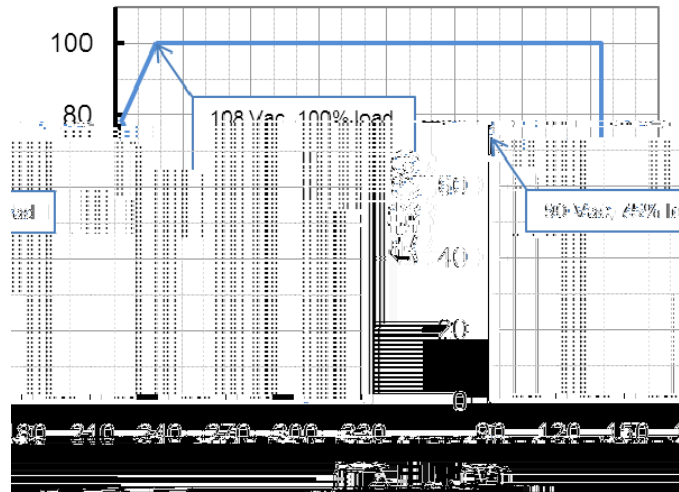


寿命 vs. 壳温

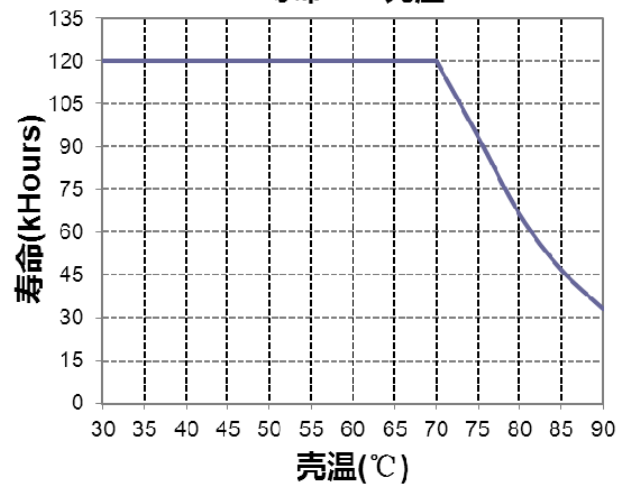

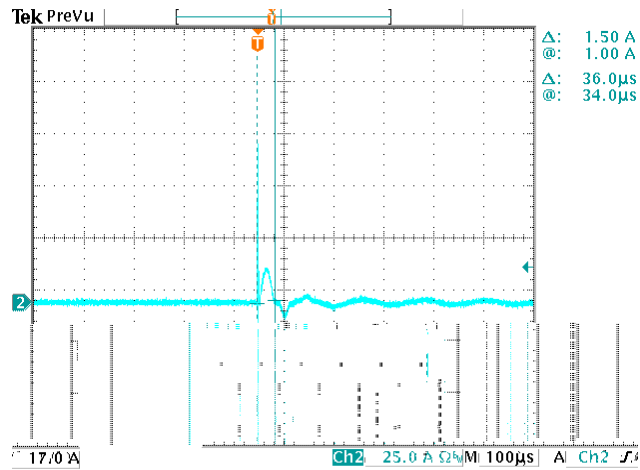


EUC-040S070DVM( $I_o=700mA$ )

效率 vs. 输出电压

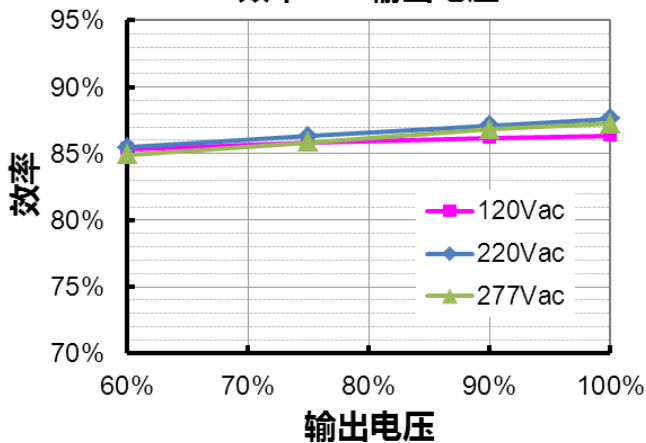


EUC-040S070DVM0004( $I_o=500mA$ )

效率 vs. 输出电压

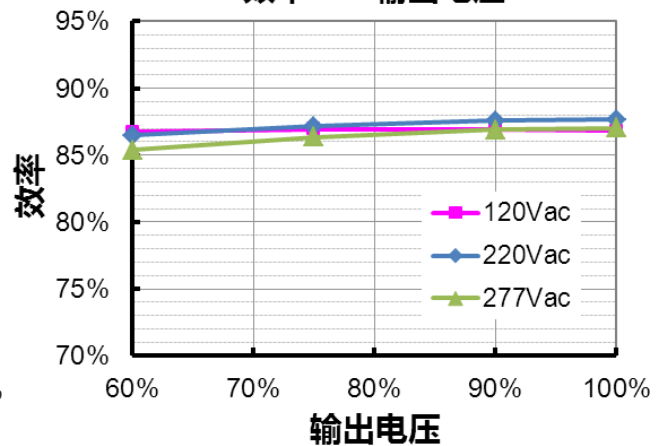


EUC-040S105DVM( $I_o=1050mA$ )



效率 vs. 输出电压

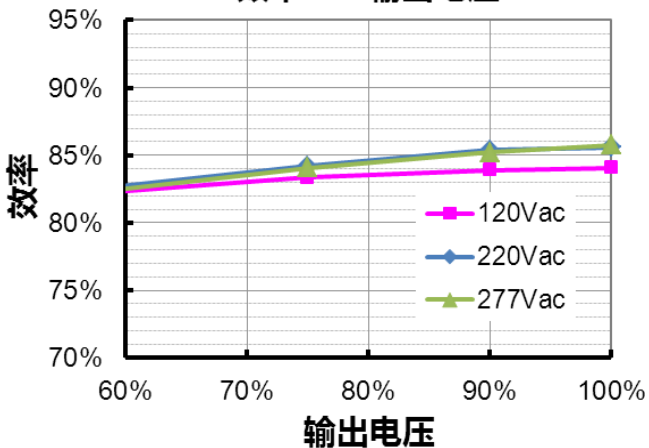


EUC-040S105DVM0004( $I_o=860mA$ )

效率 vs. 输出电压

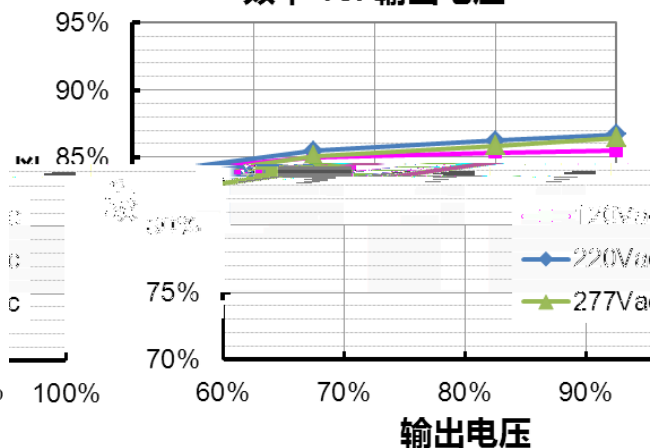

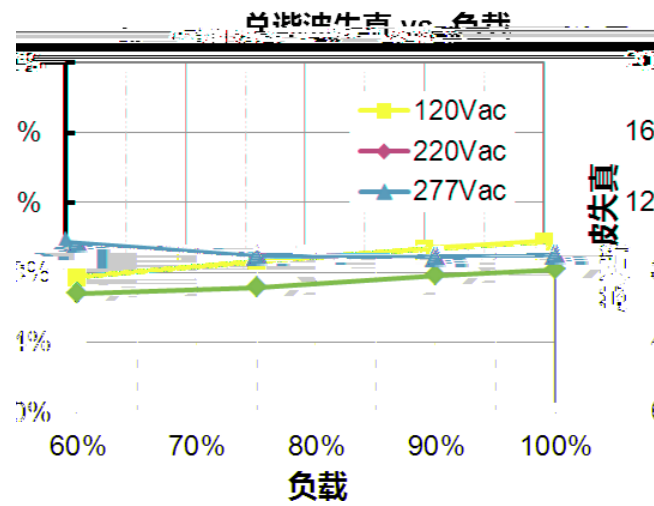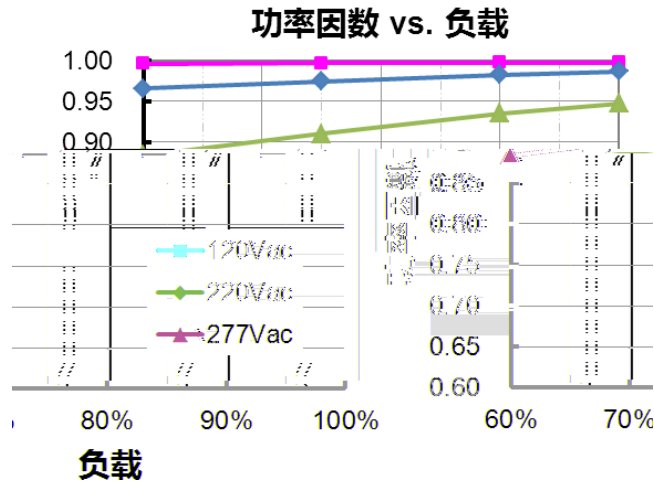


± ±				

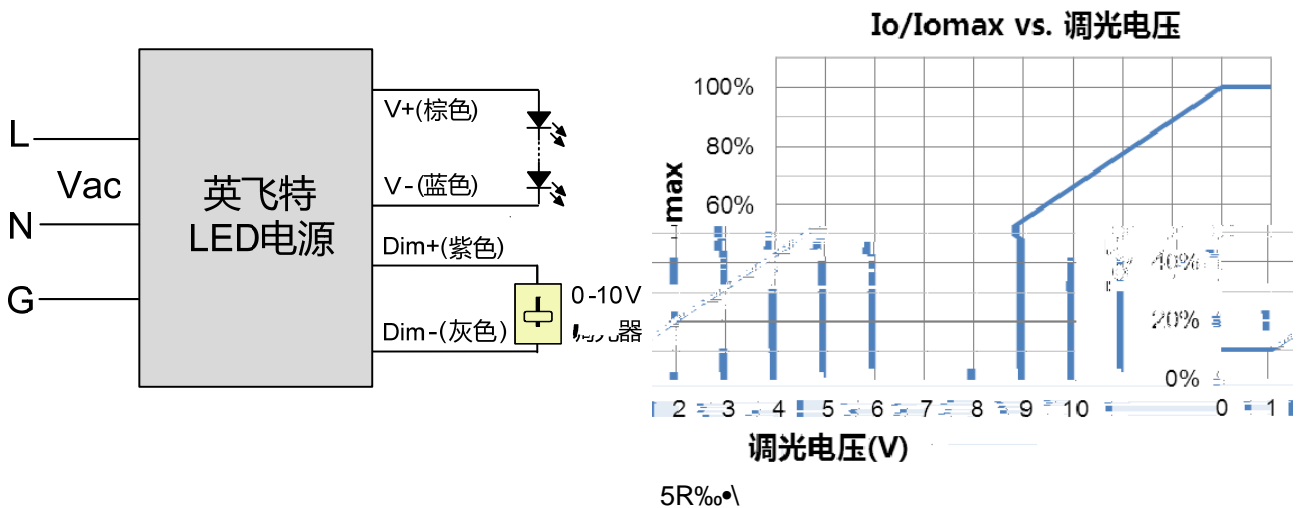

3. Dim+

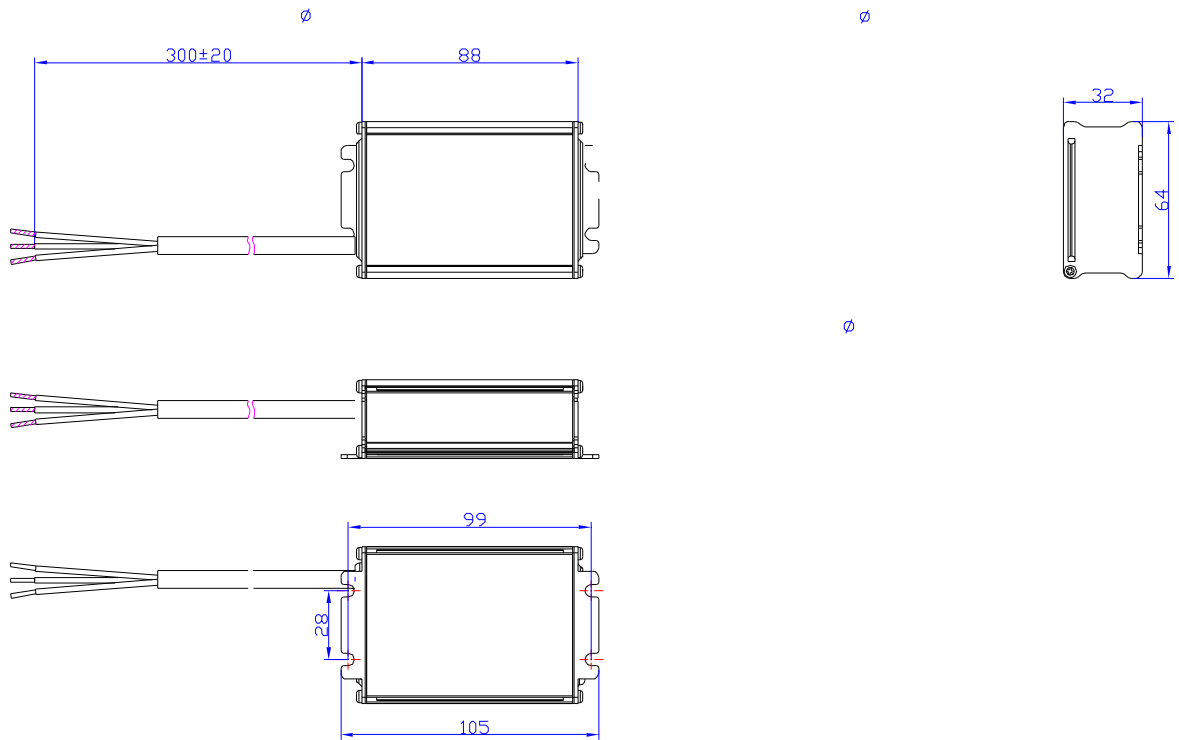

# INVENTRONICS

EUC-040SxxxDVM000x

Rev. C

			/	/
			/	
		(Vac)		
		- 0- 10V		
			/	
		- 0-10V - 1 DC	/	
		- 0-10V - 2	/	
			/	
		- - CCC	/	