


O) fl

' %0

4kV, 6kV

Ⓒ-

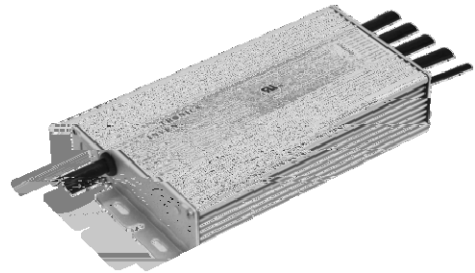

<L : \$(- ' Hoo; KŽ Kž

(- ' N

O' \$* ' , Mac

1				2			
					120Vac	220Vac	
350 mA	90 ~ 305 Vac	57~114Vdc	160 W	92.0%	0.99	0.95	EUC-160Q035DT(ST) ⁽³⁾
450 mA	90 ~ 305 Vac	45~90 Vdc	160 W	92.0%	0.99	0.95	EUC-160Q045DT(ST) ⁽³⁾⁽⁶⁾
600 mA	90 ~ 305 Vac	40~70 Vdc	168 W	91.5%	0.99	0.95	EUC-160Q060DT(ST) ⁽³⁾⁽⁶⁾
700 mA	90 ~ 305 Vac	29~57 Vdc	160 W	91.5%	0.99	0.95	EUC-160Q070DT(ST) ⁽³⁾⁽⁶⁾
1050 mA	90 ~ 305 Vac	19~38 Vdc	160 W	90.0%	0.99	0.95	EUC-160Q105DT(ST) ⁽⁴⁾⁽⁶⁾
1400 mA	90 ~ 305 Vac	14~29 Vdc	160 W	90.0%	0.99	0.95	EUC-160Q140DT(ST) ⁽⁵⁾⁽⁶⁾

(, ' fl ~ (' ' fl
))' Mac (' ' fl
 * : ajj) Ž ĺ ž
 + : ajj) Ž ž# : ajj) Ž ž
 , : ajj) Ž ž# : ajj) Ž ž
 - J<CM


	90 Vac	-	305 Vac	
	47 Hz	-	63 Hz	

160W IP67

EMI	
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 15 kV air discharge, 8 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


Ž(ž <D @

Ž ž <D @

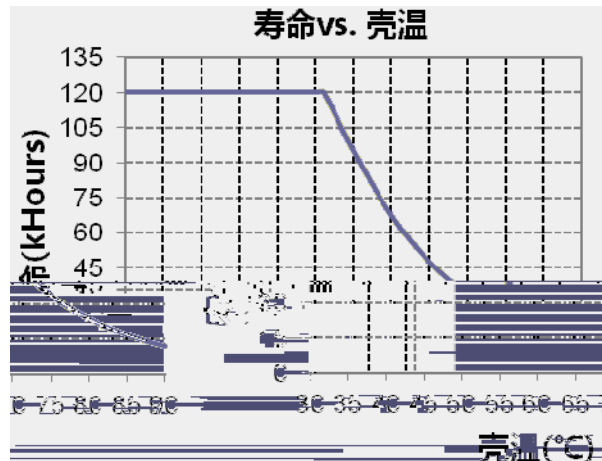


EUC-160Q035DT(ST)

效率 vs. 输出电压

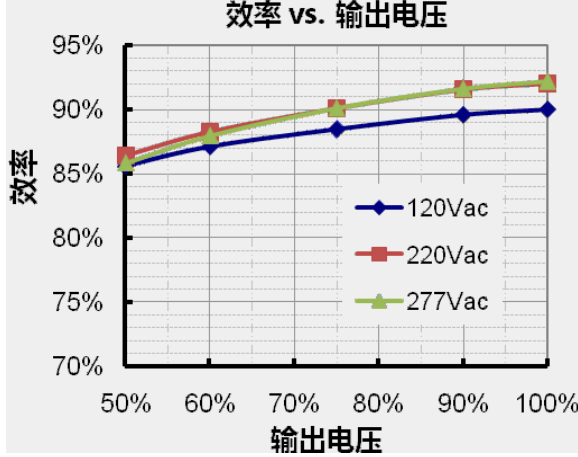


EUC-160Q045DT(ST)

效率 vs. 输出电压

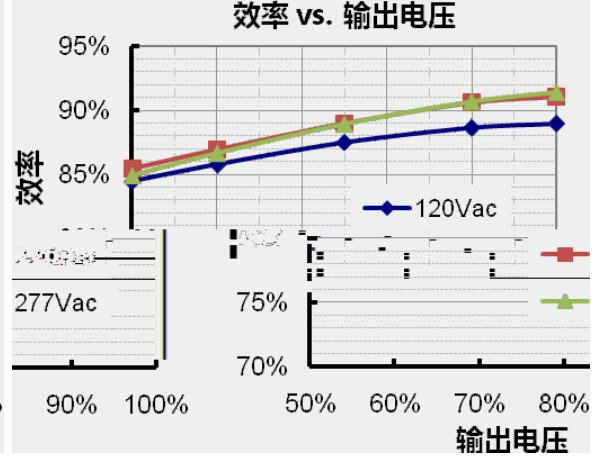


EUC-160Q060DT(ST)

效率 vs. 输出电压

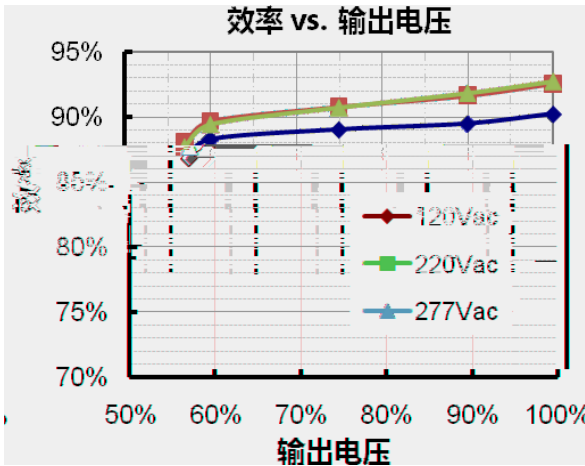


EUC-160Q070DT(ST)

效率 vs. 输出电压

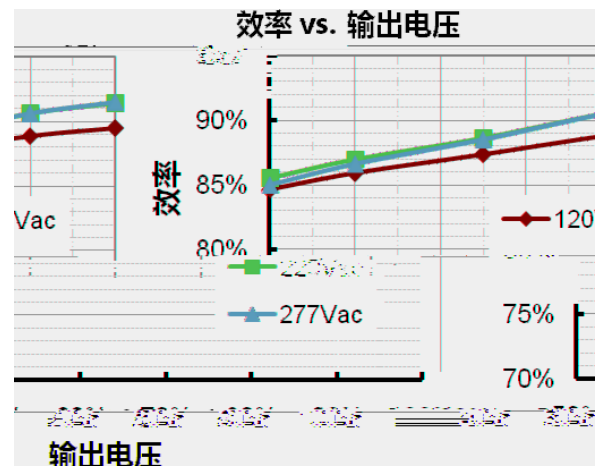


EUC-160Q105DT(ST)



效率 vs. 输出电压

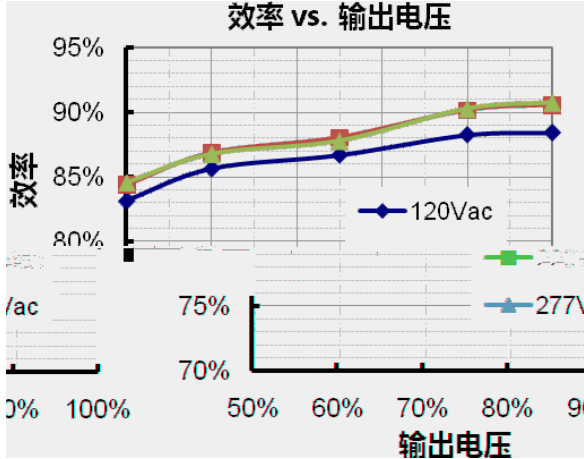

EUC-160Q140DT(ST)



效率 vs. 输出电压

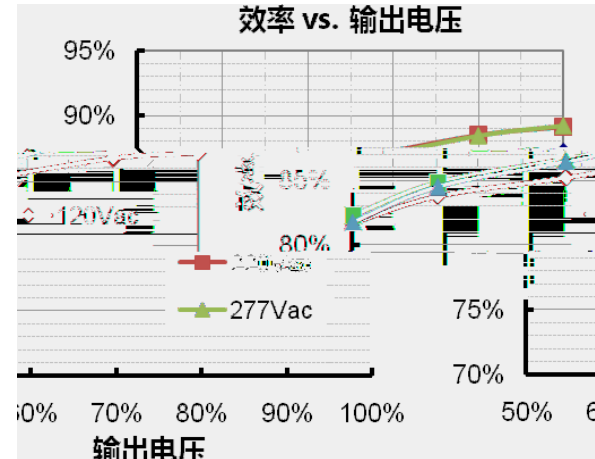

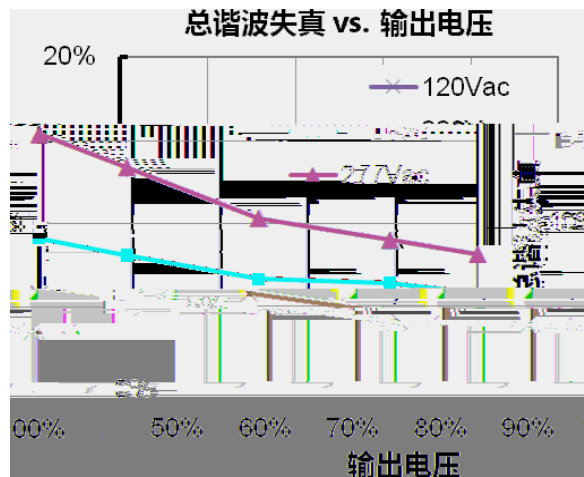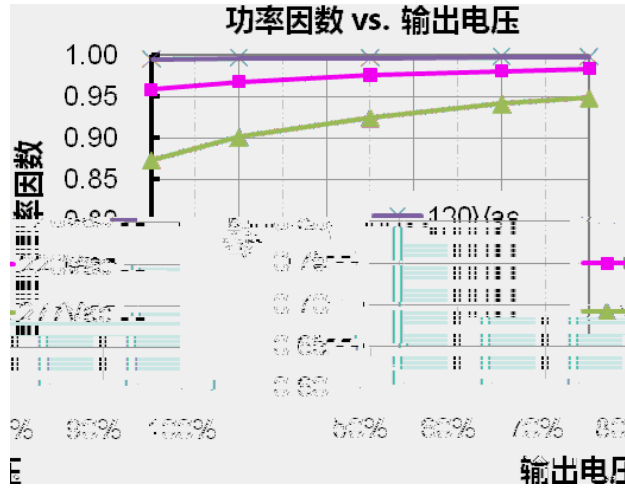

() M	10.8 V	12.0 V	13.2 V	
() M	0 mA	-	20 mA	
(~(' M	0 V	-	12 V	
(~(' M	0 μA	-	200 μA	


(~(' M

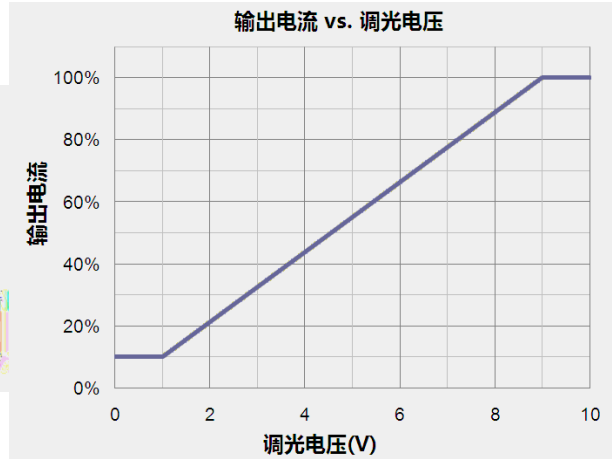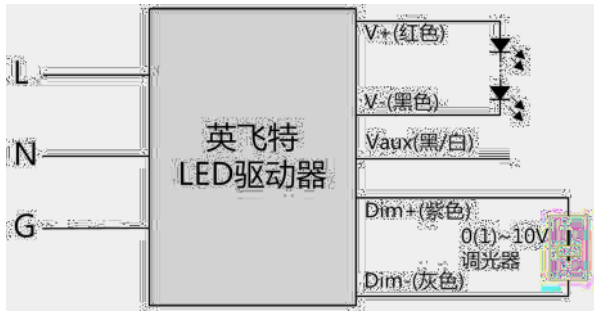


DC

(% @ @
)% , ' fl
 *% , ' fl
 +% (~(' M (M ' ~(M (' fl ~ (' ' fl
 , % C<
 -% ; id " Mal o

EUC-160QxxxDT

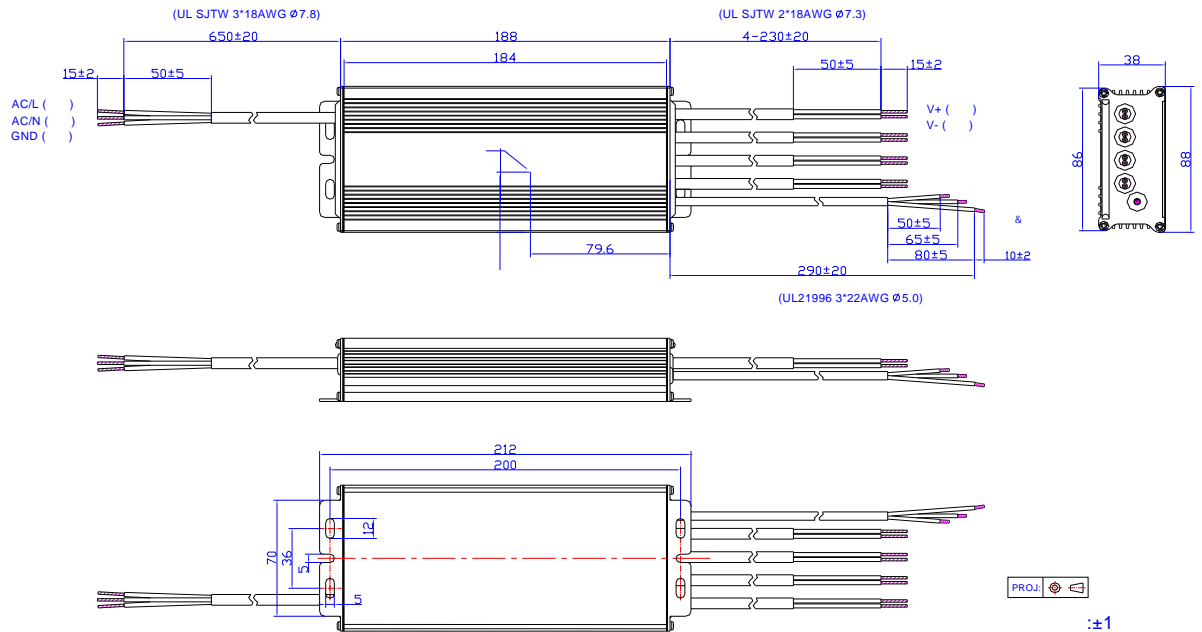

EUC-160QxxxST

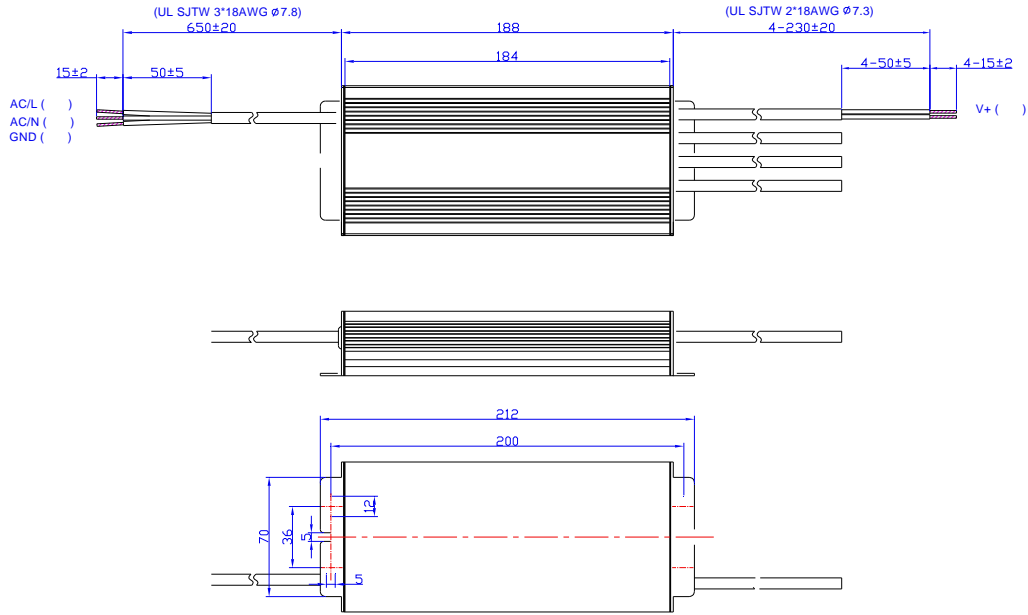

2012-03-05	A		&	&
2012-05-02	B	+ , ' d 8	&	
		(+ ' ' d 8	&	
		\$\$\$ ' ' d 8	(- ' N	(- /N
			&	
		: @j j)	&	&
	#	&		
2012-05-17	C		-35	-40
2012-05-22	D		30% lo	15%lo
			50 A	65 A
2012-7-12	E		&	
2012-7-12	F			
2012-9-7	G		&	
			&	
		@120Vac	Kpge (%j #d ao *%j	Kpge (%j #d ao) %j
		@220Vac	Kpge (%j #d ao *%j	Kpge ' %j #d ao (%j
		G=	&	
		K? ;	&	
		@k	&	
		&		
2012-11-08	H	\$Kc	115 C	120 C
		: @j j)	/	/
2013-03-14	I	* , ' d 8	&	
		K? ;	&	
			&	
			90,400hrs@60 C	94,800hrs@60 C
		&		
2013-05-21	J	D K9=	200,400hrs@60 C	306,000hrs@60 C
2013-10-10	K		&	

160W IP67