


-
- 4kV, 6kV
-
- IP67 UL
- SELV
- Class I, Division 2
- 5

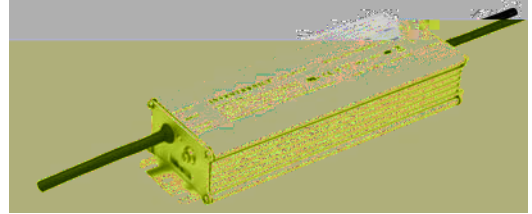

EUV-150SxxxST

150W

90-305Vac

	1			2		3

1 UL 100-277Vac; 100-240Vac KS
 2 220Vac, 100%

	90 Vac	-	305 Vac
	47 Hz	-	63 Hz

	-	-		UL8750; 277Vac/ 60Hz
	-	-		IEC60598-1; 240Vac/ 60Hz
				100Vac 100%
	-	-		220Vac 100%
I ² t				220Vac 25 10%-10% =1.2 mS
	0.90	-	-	100~ 277Vac 50-60Hz 100%
	-	-	20%	


				100%
				100%
(pk-pk)				: 20MHz 0.1uF 10uF
/				
	-	-	±	100%
	-	-	±	
				110Vac 100%
				220Vac 100%
				/ : 1 A/uS : 25% ~ 75%
	-	°		=0°C ~ Tc

				100% 25° 1%

				100% 25° 1%
				110 Vac 25 80% (MIL-HDBK-217F)
				220 Vac 80% 60
			°	@ 90-305 Vac
			°	@ 198-305 Vac
				@ 90-305 Vac 5
				@ 198-305 Vac 5
(L × W × H)				8.90 × 2.66 × 1.56
(L × W × H)				226 × 67.5 × 39.5
			-	

EMI	

: 1 EMI () EMI
 2 , / ()
 (IEC 60598-1-10.2)

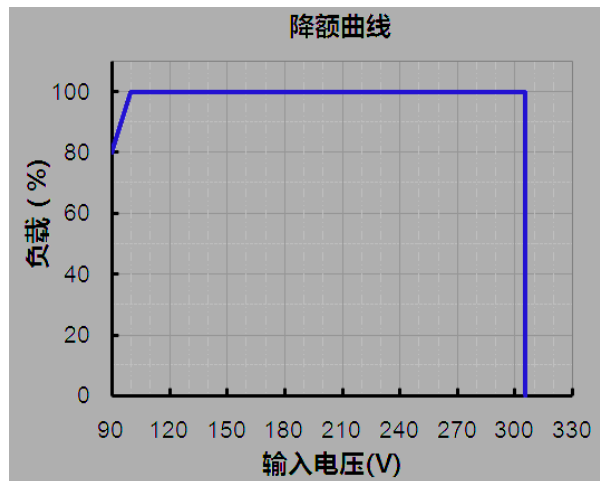



EUV-150S012ST77 00419 0 -123101 001 001 0000 00A 01200020 0 081 2 000012 75 120005T0 1200012 75 120005T

2

1.0mm²

10A.

2

2

2015-09-11	P			
			/	
			/	
			/	
			/	
2017/11/14	Q	KS	/	
			5	
		/		
			0.02%/°C	0.03%/°C
			/	
			/	
2019-01-25	R			IP67
			/	
		-	1000g	1100g
2020-01-06	S		4kV, 6kV	4kV, 6kV
			(°C)	
			/	



EUV-150SxxxST

Rev. T

150W IP67

2021-07-16	T		/	

25°C

